

FIG. 1

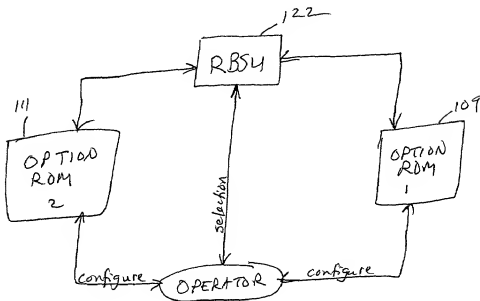


FIG. 2

Values	Description	Location
\$, O, R, C, _, E, N, T	8 byte signature to signify table start	Any paragraph boundary in DCH (C8000h - DFFFFh)
DW xxxh (filled in by option ROM during POST option ROM initialization)	16 bit offset of option ROM configuration entry point	Signature offset + 8
DW xxxh (filled in by option ROM during POST option ROM initialization)	16 bit segment of option ROM - a value of 0000h means entry point not supported	
DW 0001h	Current revision	Signature offset + 10
DW 0000h	Reserved/unused	
DD xxxxxxxh	PCI Subsystem Vendor/Device ID	Signature offset + 12
DD yyyyyyyh	Subsystem ID mask	Signature offset + 14
		Signature offset + 16
		Signature offset + 20
		Signature offset + 24

FIG. 3